

Description

Outdoor drop coaxial cable for digital reception - 75 Ohm
 Cable for digital reception (Screening Attenuation Class A)

**Data Sheet****DG80OHW**

Ø	0,80 (Cu)	3,50 (PEG)	3,60 (Al/Pet/Al)	4,00 (CuSn)	5,00 (LSZH)
---	--------------	---------------	---------------------	----------------	----------------

Class CPR acc. to UE 305/2011 (DoP)D_{ca} s2 d2 a1

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

Standards

EN 50117-2-4

Construction data

Inner conductor of plain copper	(Cu)	Ø 0,80 ± 0,02	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 3,50 ± 0,10	mm
Aluminium/Polyester/Aluminium tape longitudinally overlapped	(Al/Pet/Al)		
Water repellent sealing (dielectric)	(Jelly1)		
Braid of tinned copper wires	0,100	(CuSn)	
Braid optical coverage (IEC 96-1)		65	%
Diameter over Braid		Ø 4,00	mm
Outer sheath of Thermoplastic material - white - halogen-free, low smoke, flame retardant and UV-resistant	(LSZH)	Ø 5,00 ± 0,10	mm

Printed each meter by blue ink-jet :

CAVEL DG 80 OHW MADE IN ITALY 75Ohm Euroclass Dca s2,d2,a1 EN50117-2-5 CEI-UNEL 36762 C-4 (U0 = 400V) ULTRA HD / 4K gggaan m

(gggaan=batch number m=meter marking)

Physical data

Weight of copper conductors	11,13	kg/km
Total weight of cable	26,60	kg/km
Minimum bending radius (single/repetead bending)	25/50	mm
Maximum cable pulling strength	90	N
Minimum installation temperature	-5	°C
Operating temperature	-25 / +80	°C

Electrical data

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		35	Ohm/km
Outer conductor resistance		18,60	Ohm/km
Loop resistance		53,60	Ohm/km
Sheat Insulation voltage (spark test)		2,50	kV
Maximum current (Ieff)		4	A

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212

Date

07/12/2016

Responsible

Alberto Scardovi

Description

Outdoor drop coaxial cable for digital reception - 75 Ohm
 Cable for digital reception (Screening Attenuation Class A)



Data Sheet

DG800HW

Structural return loss (SRL)

5 - 470 MHz	>30 dB
470 - 1000 MHz	>28 dB
1000 - 2000 MHz	>26 dB
2000 - 3000 MHz	>22 dB

Screening Attenuation (SA)	SA-Class A	Shield Transfer Impedance (Zt)	Zt-Class B
30 - 1000 MHz	>90 dB	5 - 30 MHz	< 9 mΩ/m
1000 - 2000 MHz	> 75 dB		
2000 - 3000 MHz	> 65 dB		


Attenuation (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	2,10	862	23,00
10	3,00	1000	24,90
30	4,40	1750	33,50
50	5,70	2150	37,40
200	11,00	2400	39,60
300	13,50	3000	44,80
470	16,80		

Attenuazione di schermatura / Screening Attenuation

Cavo classe A / A Class Cable

Cavo tipo / Cable type : **DG 800HW**

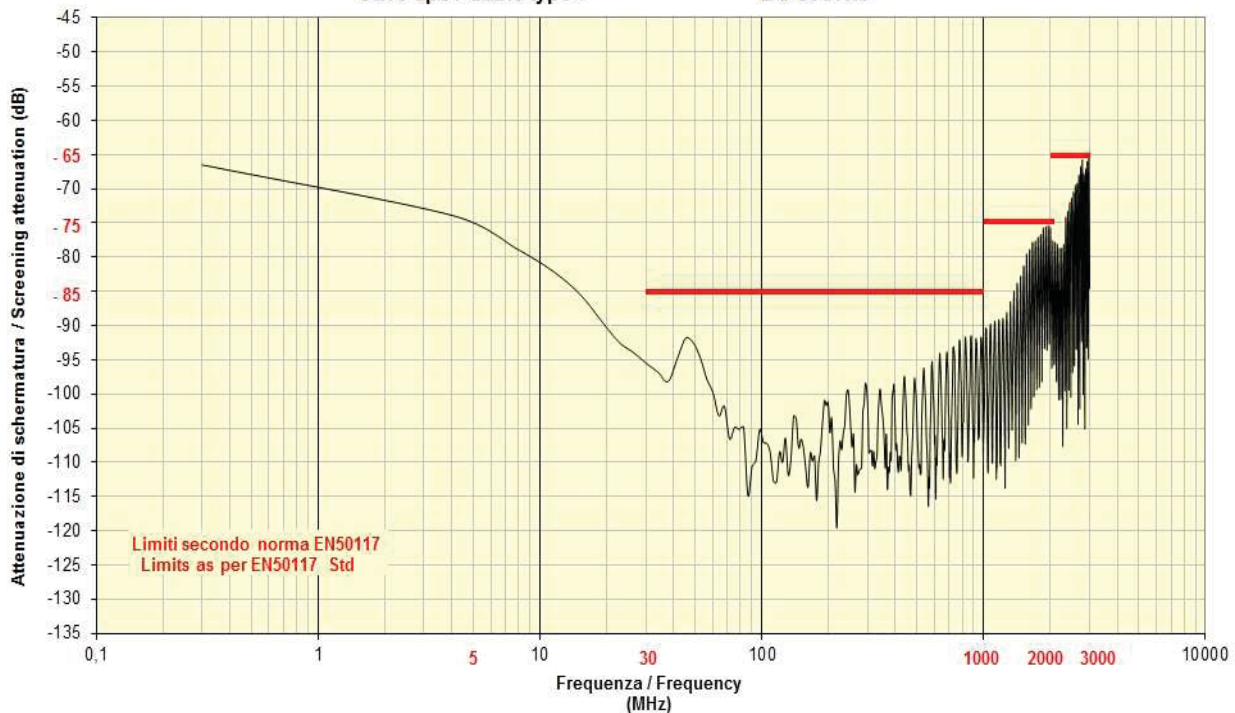

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212

Date

07/12/2016

Responsible

Alberto Scardovi