

ACTIVE OPTICAL COMPONENTS

OPTICAL SYSTEM TECHNOLOGY | Amplifiers, switches and receiver



FTTH NETWORKS

Further information on DKTCOMEGA.com

Sign up for our email newsletter and always be informed first!

SIGN UP

Version 1.2

DATASHEET

INTRODUCTION

Each device from our active optical components has its own special features. The optical amplifiers have an extremely high power and a low noise figure on every single port, whereas the optical switch has a very short switching time.

PRODUCTS

- 3 **OPTICAL AMPLIFIERS**
 - “EDFA-1550-1x17”**
 - “EDFA-1550-4x17”**
 - “EDFA-1550-8x17-HP”**

- 5 **OPTICAL SWITCH**
 - “OSW-2”**

- 6 **OPTICAL RECEIVER**
 - “ORC-01”**

EDFA-1550-XXX OPTICAL AMPLIFIER

PRODUCT OVERVIEW

“EDFA-1550-xx17 series”

Parameter	EDFA-1550-1x17	EDFA-1550-4x17
Operating wavelength [nm]	1545 - 1565	
Optical input power range [dBm]	-3 ... +10	
Output power stability [dBm]	± 0.5	
Return loss optical output [dB]	≥ 45	
Return loss optical input [dB]	≥ 45	
Noise figure [dB μ V]	≤ 5	
Optical connectors	SC/APC	
Power consumption [W]	30	
Operating temperature range [°C]	-5 ... +55	
Storage temperature range [°C]	-30 ... +70	
Max. relative humidity (operation and storage)	max. 95 %, not condensing	
Dimensions (L x W x H) [mm]	483 x 420 x 44	
Weight [kg]	3.7	
Rack unit	19"/1 RU	
Output ports	1	4
Output power per port [dBm]	17	
Item No.	64656	64657

ADDITIONAL INFORMATION

- Connector types:
SC/APC (optical) - E2000/APC alternative available upon request
- High-performance erbium doped fiber amplifier with low noise pump laser
- Network management interface, in line with standard SNMP network management
- Intelligent temperature control system for lowering the power consumption
- System parameter setting by front panel keypad, serial interface (RS 232) or user-friendly web interface
- 2 power supplies with each 50 % load sharing, 160 ... 250 VAC or 48 VDC, hot-pluggable, hot swappable
- 1 - 4 output ports
- high optical output power per port
- Adjustable attenuation at the output -3 - 0 dB
- Low noise figure
- RS 232 and RJ 45 control interface



EDFA-1550-XXX-HP-1U

HIGH POWER OPTICAL AMPLIFIERS

PRODUCT OVERVIEW

“EDFA-1550-8x17-HP”

Parameter	EDFA-1550-8x17-HP-1U
Operating wavelength [nm]	1545 - 1565
Optical input power range [dBm]	-3 ... +10
Output power stability [dBm]	± 0.5
Return loss optical output [dB]	≥ 45
Return loss optical input [dB]	≥ 45
Noise figure [dB _μ V]	≤ 5
Optical connectors	SC/APC
Power consumption [W]	30
Operating temperature range [°C]	-10 ... +45
Storage temperature range [°C]	-30 ... +70
Max. relative humidity (operation and storage)	max. 95 %, not condensing
Dimensions (L x W x H) [mm]	483 x 420 x 44
Weight [kg]	3.7
Rack unit	19"/1 RU
Output ports	8
Output power per port [dBm]	17
Item No.	64658

ADDITIONAL INFORMATION

- Connector types:
SC/APC (optical) - E2000/APC alternative available upon request
- Network management interface, in line with standard SNMP network management
- Intelligent temperature control system for lowering the power consumption
- System parameter setting by front panel keypad, serial interface (RS 232) or user-friendly web interface
- 2 power supplies with each 50 % load sharing, 160 ... 250 VAC or 48 VDC, hot-pluggable, hot swappable
- Adopts erbium ytterbium co-doped double-clad fiber technology
- 4 - 16 output ports
- Extremely high optical output power per port
- Adjustable attenuation at the output -3 - 0 dB
- Low noise figure
- RS 232 and RJ 45 control interface



“EDFA-1550-8x17-HP”

1 X 2 OPTICAL SWITCH FOR REDUNDANT OPTICAL FIBER TRANSMISSIONS

PRODUCT OVERVIEW

“OSW-2”

Parameter	OSW-2
Operating wavelength [nm]	1200 ... 1620
Max. optical input power [dBm]	27
Insertion loss [dB]	≤ 1.3 (tested at 1310, 1490, 1550 nm)
Return loss output [dB]	> 55
Optical return loss [dB]	> 55
Optical input power ranges [dBm]	-15 ... +24
Max. switching life (switching amounts)	≥ 10.000.000
Optical connectors	SC/APC
Supply voltage	2 x 160 - 250 VAC/50 Hz (each 50 % load sharing)
Power consumption [W]	≤ 2
Operating temperature range [°C]	-5 ... +55
Storage temperature range [°C]	30 ... +70
Item No.	65400



ADDITIONAL INFORMATION

- Very low switching time
- Transmission of very high optical powers
- Advanced 32 bit processor for punctual and accurate monitoring of input power, reliable control of switch status and setup of automatic or manual switch mode
- Switches automatically when optical signal has a fault
- System parameters setting by front panel keypad or serial interface (RS 232)
- SNMP network management functionality via RJ 45 interface
- 2 power supplies with each 50 % load sharing, in case one power supply fails the second takes over
- Built-in LCD monitor
- SC/APC connectors at the front side
- Dimensions: 19"/1 RU (483 x 285 x 44 mm (W x D x H))
- Weight: approx. 2.0 kg

OPTICAL BROADBAND RECEIVERS WITH HIGH POWER OUTPUT FOR CATV APPLICATIONS

PRODUCT OVERVIEW


“BTV-ORC-01”

Parameter	BTV-ORC-01
Max. optical input power [dBm]	-9 - +2
Responsivity [A/W]	0.85
Switching time [ms]	≤ 10
Optical return loss [dB]	45
Optical connectors input	SC/APC
Operation bandwidth [MHz]	45 - 1006
Output level [dBμV]	110 (-9 - +2 dBm i) 112 (-8 - +2 dBm i)
Flatness [dB]	-0.75 - +0.75
Return loss [dB]	14
Test point [dB typ.]	-20
Composite Second Order (CSO) [dB]	60 ¹⁾
Composite Triple Beat (CTB) [dB]	60 ¹⁾
Carrier-to Noise (C/N) [dB]	51 ¹⁾
Supply voltage [VAC]	150 ... 265
Operating temperature range [°C]	-20 - +55
Storage temperature range [°C]	-40 - +60
Power consumption [W]	8
Operating wavelength [nm]	1100 - 1600
Item No.	65905

¹⁾ At P IN = -1 dBm, P OUT = 106 dBμV, 42 CH CENELEC, OMI = 3.5 %

ADDITIONAL INFORMATION

- Optical status indication by LEDs
- Integrated test point for the RF output
- Very high and constant RF output level within the whole optical input power range by an integrated automatic gain control (AGC)
- Connector types: SC/APC (optical) and F-females
- Dimensions: approx. 190 x 110 x 52 mm (W x H x D)
- Weight: approx. 0.4 kg

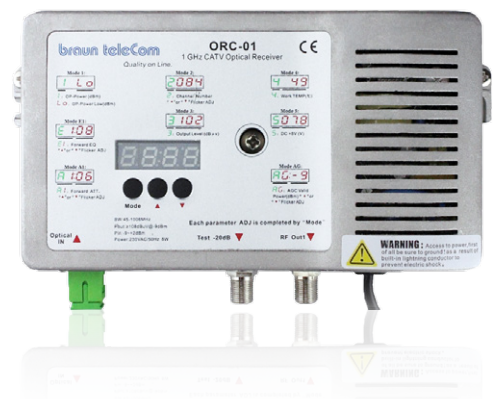

“BTV-ORC-01”