


DKT FTTH BATTERY 2

BATTERY REPLACEMENT INSTRUCTIONS

5 x 3.7 V / 2500 mAh 18650 Li-ion batteries
= 18.5 V, 46.25 Wh

- 1 Remove all connectors.
- 2 Remove the 2 screws (red in the picture) marked "Remove for battery replacement".

Do not remove the other screws!

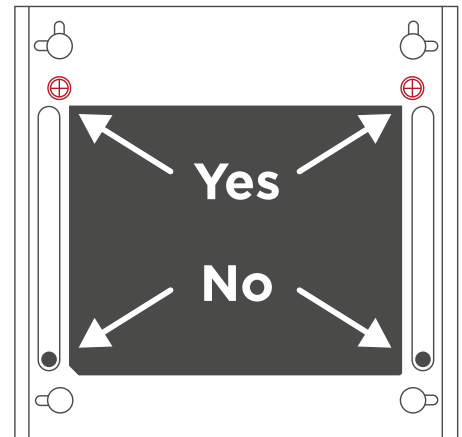

- 3 Hold the outer cover of the device and push the connector side to open the battery compartment.

- 4 Remove all 5 batteries one at a time by lifting the positive pole first, the + pole has a button at the top.

- 5 Insert 5 new batteries, minding type, and polarity, and insert the negative end first.

- 6 Close the battery compartment and reinstall the 2 screws.

- 7 Re-connect input and loads, by refitting all connectors again. All USB-C ports are identical so swapping cables will not cause problems.

It is important to use the correct cables for your devices.

